

JetInks®

MACCELL

Large Character Printer



Fastest Print Speed

1250 drops per second



Smallest Design

Only 4mm diameter / each solenoid valve




Robust Design

Whole Stainless Steel Printhead



Easy Maintenance & Drop Adjust

Pocket Type & Easy Disassembly Design

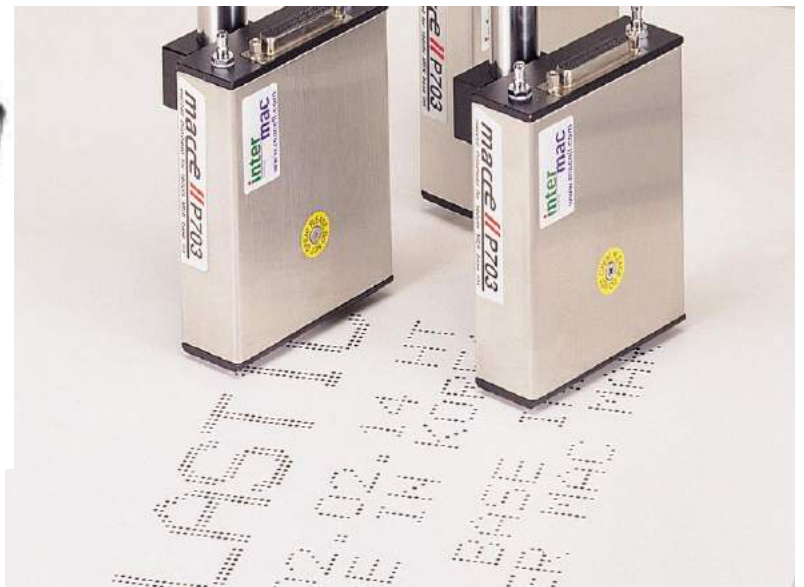

Designed & Manufactured by

interMAC
Korea

JetInks® **MACCELL** Specifications

ITEMS	maccell 7100+plus	maccell 7200+plus	maccell 7400+plus
Character Font matrix(HXW)	5x5, 7x5 or 7x10 One line	5x5, 7x5 or 7x10 Two lines 16x10, 16x20 One line	5x5, 7x5 or 7x10 Two lines 15x10, 15x20 Two lines 32x20, 32x40 One line
Character Height	7nozzles printhead 26mm "P" Type 14or24mm "C" T ype	16nozzles printhead 63mm "P" Type 33or60mm "C" T ype	32nozzles printhead 130mm "P" Type 68or 124mm "C" T ype
Data Storage	Text 1000 Chacters/1Line (7Dots, 16Dots matrix)		500Char/Line (32Dots matrix)
Print Speed	Up to 170 meters/min(max) "P" Type Up to 120 meters/min(max) "C" Type		
Memory Location	100 Each memory storage location		
Custom Characters	7 or 16(H)X122dots(W) 50 each graphic data		
Data interface	RS232, RS485		
Lan Networking	up to 15 controllers		
LCD Display	64(H) X 128(V) Dots back light graphic LCD		
Font reduction	Font Reduction 0,1,2 or 3 Changeable		
Print Function	Date, Real Time, Expiry date, Shift Time, Up-Counter Single/ Double/ Light print, Repeat print, Print direction Odd/ Even Counter, Repeat Counter		
Hot key Function	Dot size, Print speed, Print delay, Purge		
Keypad	Tone up Keypad 59keys, Dialogue Menu		
Ink Container	2.5 Liters Stainless Steel Container(standard) 5, 14Liters container(option)		
Inks	M.E.K Base(Dye base) "P" type Water base "C" type		
Input Signal	Photocell for Printout, Speed Encoder		
Power	90-250V AC 50Hz		
Operating Temp	5-45°C		



Exclusive Partner for India & Saarc countries -



Jet Inks Private Limited

No. 22, Nungambakkam High Road, Chennai - 600034

Phone: +91 44 42233200 E-mail: corporate@jetinkspl.com

www.jetinks.net

An ISO 9000:2001 Certified Company